



lift to
disengage



Description

Material:

Handle:

Hard component fibreglass reinforced plastic with die-cast zinc toothed ring.

Soft component Thermoflex based on SEBS.

Steel parts: grade 5.8.

Version:

Steel parts black oxidised.

Note:


The hard and soft components are supplied in black grey RAL 7021 as standard.

On request:

Other female threads, colour combinations and special versions.

Dimension "H1" available in other lengths on request at extra charge.

Drawings

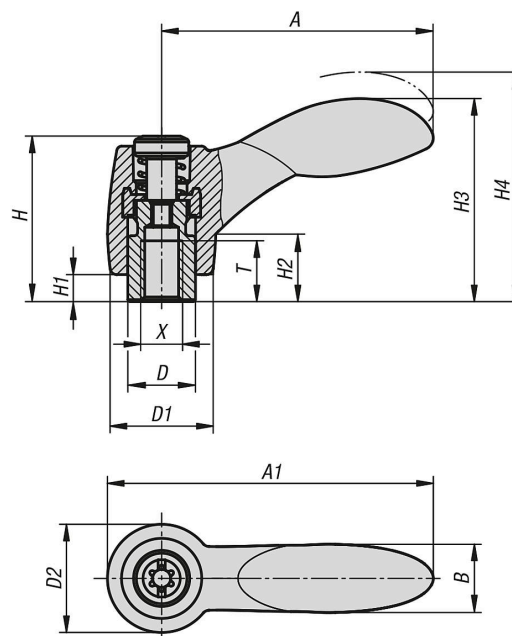

06604 Clamping levers 2K with internal thread, threaded insert black oxidised steel



Overview of items

Order No.	Component material	X	T	D	D1	D2	H	H1	H2	H3	H4	A	A1	B	No. of teeth
06604-10401	steel	M4	9	10	15	16	24,5	4	10	30	33,5	40,1	48,1	10,1	16
06604-10501	steel	M5	9	10	15	16	24,5	4	10	30	33,5	40,1	48,1	10,1	16
06604-10601	steel	M6	9	10	15	16	24,5	4	10	30	33,5	40,1	48,1	10,1	16
06604-20601	steel	M6	12	13,5	17,5	19	28,5	6,5	12,5	41,2	45,2	64,9	74,4	17,6	20
06604-20801	steel	M8	12	13,5	17,5	19	28,5	6,5	12,5	41,2	45,2	64,9	74,4	17,6	20
06604-30801	steel	M8	14	16	21	22	37	10	17	51,6	56,1	80,2	91,2	20,7	22
06604-31001	steel	M10	14	16	21	22	37	10	17	51,6	56,1	80,2	91,2	20,7	22